

BENTEX

SKN

Air Break Star Delta
Semi Automatic
Submersible Control Panel with
Single Phasing Protection
Type: BASP- 415V AC 3 Phase 50 hz



पचास सालों से मेरी दमदार पसन्द
— दारा सिंह



SKN - BENTEX
GROUP


BENTEX



SUBMERSIBLE CONTROL PANELS




A PANEL WITH LONGER DURABILITY

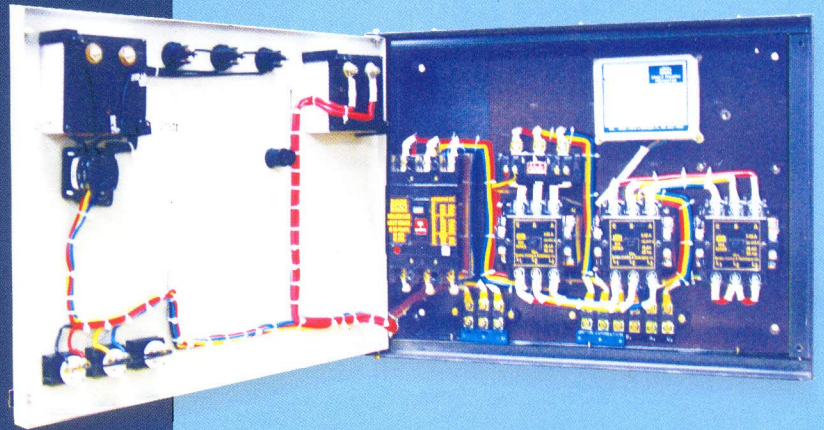

TYPE BASP

Air Break Star Delta Semi Automatic Submersible Control Panel with Single Phasing Protection
Type: BASP- 415V AC 3 Phase 50 hz

TECHNICAL DETAILS	7.5 TO 40 HP	TYPE	REAL RANGE	H.P.
COIL VOLTAGE	380 V	BASP	6-10AMP	7.5
OVERLOAD RELAY	MANUALLY RESET	BASP	9-14 AMP	10
PICK UP VOLTAGE	180 TO 230 V	BASP	13-21 AMP	15
DROP OUT VOLTAGE	50 TO 60V	BASP	20-32 AMP	20
MEASUREMENT OFFERED	AMMETER	BASP	25-35 AMP.	25
	VOLTMETER WITH SELECTOR SWITCH			
PHASE INDICATING LAMPS	SUPPLY ON	BASP	25-35 AMP.	30
	PUMP ON	BASP	25-35 AMP.	35
AUTO PREVENTOR FULL START	10 To15 SEC	BASP	28-42 AMP.	40
MCCB	63A TO 100A			

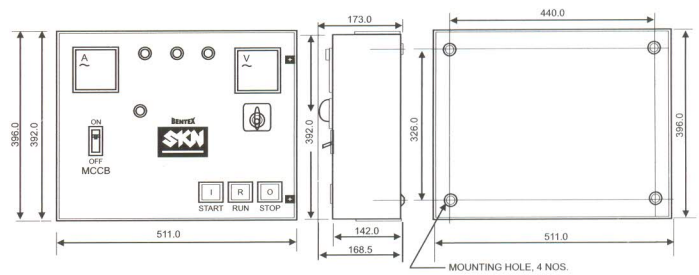


TYPE : BASP

HP	MRP. Rs.
7.5/10 HP	Rs. 11100.00
15 HP	Rs. 12250.00
20/25 HP	Rs. 14250.00
30/35 HP	Rs. 15650.00
40 HP	Rs. 16150.00



पचास सालों से मेरी दमदार पसन्द
— दारा सिंह

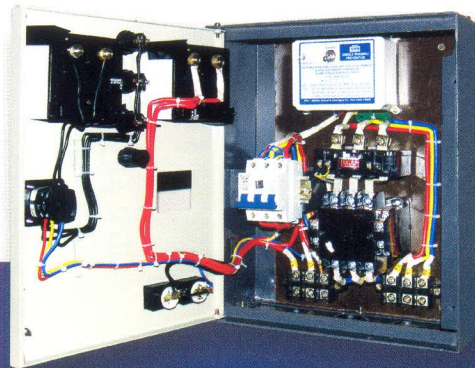

Air Break Direct On Line Automatic Submersible Control Panel with Single Phasing Protection
Type: BADL - 415V AC 3 Phase 50 Hz



TECHNICAL DETAILS	7.5 TO 20 HP	TYPE	REAL RANGE	H.P
COIL VOLTAGE	380 V	BADL	9-14 AMP	7.5
OVERLOAD RELAY	MANUALLY RESET	BADL	13-21 AMP	10
PICK UP VOLTAGE	180 TO 230 V	BADL	20-32 AMP	15
DROP OUT VOLTAGE	50 TO 60V	BADL	25-35 AMP	20
MEASUREMENT OFFERED	AMMETER VOLTMETER WITH SELECTOR SWITCH			
PHASE INDICATING LAMPS	SUPPLY ON PUMP ON			
AUTO PREVENTOR FULL START	10 To15 SEC			
MCB TP	32A TO 63A			

Air Break Fully Automatic Star Delta Submersible Control Panel with Single Phasing Protection
Type: FASP-415V AC 3 Phase 50 hz

TECHNICAL DETAILS	7.5 TO 40 HP	TYPE	REAL RANGE	H.P.
COIL VOLTAGE	380 V	FASP	6-10 AMP	7.5
OVERLOAD RELAY	MANUALLY RESET	FASP	9-14 AMP	10
PICK UP VOLTAGE	180 TO 230 V	FASP	13-21 AMP	15
DROP OUT VOLTAGE	50 TO 60V	FASP	20-32 AMP	20
MEASUREMENT OFFERED	AMMETER VOLTMETER WITH SELECTOR SWITCH	FASP	25-35 AMP	25
		FASP	25-35 AMP	30
PHASE INDICATING LAMPS	SUPPLY ON PUMP ON	FASP	25-35 AMP	35
AUTO PREVENTOR FULL START	10 To15 SEC	FASP	28-42 AMP	40
AUTOMATIC STAR DELTA WITH TIMER				
MCCB			63A TO 100A	

HP	MRP. Rs.
7.5 HP	Rs. 4995.00
10 HP	Rs. 4995.00
15 HP	Rs. 5495.00
20 HP	Rs. 7095.00


HP	MRP. Rs.
7.5/10 HP	Rs. 12100.00
15 HP	Rs. 13250.00
20/25 HP	Rs. 15250.00
30/35 HP	Rs. 16650.00
40 HP	Rs. 17150.00

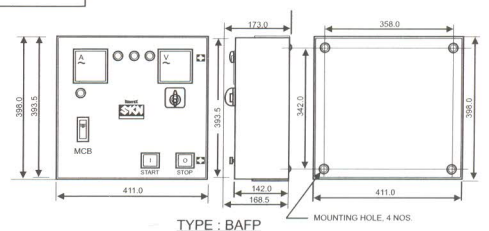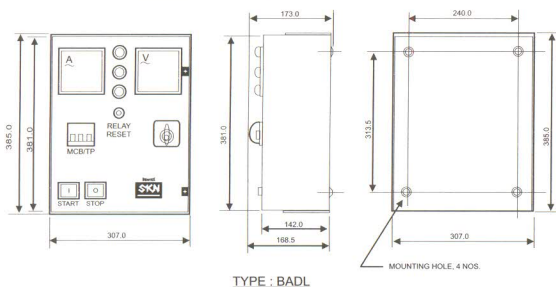




**Air Break Single Phase Submersible Panel without
contactor with - MCB- SP**
Type: SMC-1 AC-90V to 240V
For oil field submersible pump

TECHNICAL DETAILS		HP	Running Capacitor	Maximum overload	MRP.Rs.
COIL VOLTAGE	90V to 240V	0.5	36 MFD	7 AMP.	1225.00
MEASUREMENT OFFERED	AMMETER	1.0	36 MFD.	10 AMP.	1225.00
	VOLT METER WITH SWITCH	1.5	50 MFD	12 AMP.	1285.00
MANUALLY SWITCH	ON / OFF	2.0	72 MFD	16 AMP.	1370.00
INDICATING LAMPS	SUPPLY ON				
	PUMP ON				

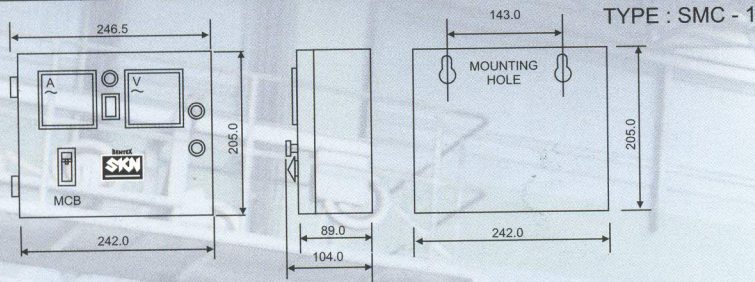


**Air Break Single Phase Without Contactor
Submersible Panel with- MCB-SP**
Type: SMC-2 AC-90V to 240V
For oil field submersible pump / water fill

TECHNICAL DETAILS		HP	Running Capacitor	Starting Capacitor	Maximum overload	MRP.Rs.
COIL VOLTAGE	90V to 240V	0.5	36 MFD	120/150 MFD	7 AMP.	1680.00
MEASUREMENT OFFERED	AMMETER	1.0	36 MFD.	150/200 MFD.	10 AMP.	1750.00
	VOLT METER WITH SWITCH	1.5	50 MFD	150/200 MFD	12 AMP.	1900.00
MANUALLY SWITCH	ON / OFF	2.0	72 MFD	200/250 MFD	16 AMP.	1950.00
INDICATING LAMPS	SUPPLY ON					
	PUMP ON					

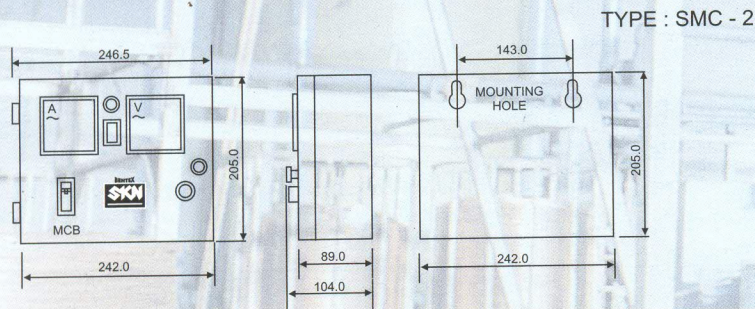

**Air Break Single Phase With Contactor
Submersible Panel with- MCB-SP**
Type: SMC-3 AC-90V to 240V
For water field submersible pump

TECHNICAL DETAILS		HP	Running Capacitor	Starting Capacitor	Maximum overload	MRP.Rs.
COIL VOLTAGE	90V to 240V	1.0	50 MFD	120/150 MFD	10 AMP.	2400.00
MEASUREMENT OFFERED	AMMETER	1.5	60 MFD.	150/200 MFD.	12 AMP.	2550.00
	VOLT METER WITH SWITCH	2.0	72 MFD	200/250 MFD	16 AMP.	2925.00
MANUALLY SWITCH	ON	3.0	105 MFD	250/300 MFD	27 AMP.	3300.00
INDICATING LAMPS	SUPPLY ON					
	PUMP ON					

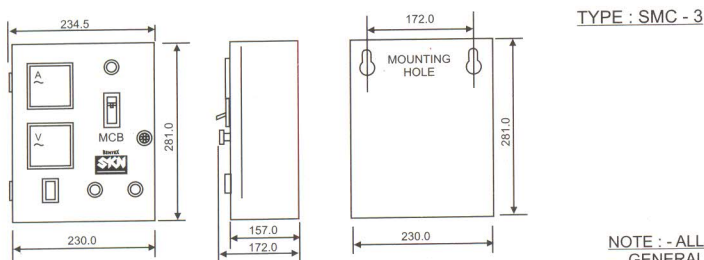

NOTE : - ALL DIMENSIONS ARE IN M.M.
GENERAL TOLERANCE + 2.0 M.M.



BENTEX CONTROL & SWITCHGEAR CO.

B63-65/3, Naraina Industrial Area, Phase-II, New Delhi-110028, India.

Ph: 011-45698100 (30 Lines), Email: sknbentex.delhi@gmail.com Head office : email: feedback@sknbentex.com

Website : www.sknbentex.com